

TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371

NAK1-BP02

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.5)

09/857721

INTERNATIONAL APPLICATION NO.

PCT/JP00/07225

INTERNATIONAL FILING DATE

18 October 2000

PRIORITY DATE CLAIMED

19 October 1999

TITLE OF INVENTION

METHOD FOR PRODUCING METAL ELECTRODE

APPLICANT(S) FOR DO/EO/US

MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below.
4. ☐ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
  - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
  - b. ☒ has been communicated by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
  - a. ☒ is attached hereto.
  - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
  - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ have been communicated by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☒ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
10. ☐ An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).
11. ☐ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☒ A copy of the International Search Report (PCT/ISA/210).

Items 13 to 20 below concern document(s) or information included:

13. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
20. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
21. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
22. ☒ Certificate of Mailing by Express Mail
23. ☒ Other items or information:

COPY OF PCT REQUEST

UNEXECUTED DECLARATION &amp; POWER OF ATTORNEY

COPY OF THE PCT INT'L PUBLICATION

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.53) **09/857721** INTERNATIONAL APPLICATION NO. **PCT/JP00/07225** ATTORNEY'S DOCKET NUMBER **NAK1-BP02**

24. The following fees are submitted:

**BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :**

- ☐ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO ..... **\$1000.00**
- ☒ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO ..... **\$860.00**
- ☐ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... **\$710.00**
- ☐ International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... **\$690.00**
- ☐ International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) ..... **\$100.00**

**ENTER APPROPRIATE BASIC FEE AMOUNT =**

**CALCULATIONS PTO USE ONLY**

**\$860.00**

Surcharge of **\$130.00** for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).

**\$0.00**

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	14 - 20 =	0	x \$18.00
Independent claims	3 - 3 =	0	x \$80.00

**\$0.00**

**\$0.00**

Multiple Dependent Claims (check if applicable). ☐

**\$0.00**

**TOTAL OF ABOVE CALCULATIONS =**

**\$860.00**

☐ Applicant claims small entity status. (See 37 CFR 1.27). The fees indicated above are reduced by 1/2.

**\$0.00**

**SUBTOTAL =**

**\$860.00**

Processing fee of **\$130.00** for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).

**\$0.00**

**TOTAL NATIONAL FEE =**

**\$860.00**

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). ☐

**\$0.00**

**TOTAL FEES ENCLOSED =**

**\$860.00**

Amount to be:	\$
refunded	
charged	\$

- a. ☒ A check in the amount of **\$860.00** to cover the above fees is enclosed.
- b. ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \_\_\_\_\_ to cover the above fees. A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. **16-2462**. A duplicate copy of this sheet is enclosed.
- d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

**NOTE:** Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Joseph W. Price  
PRICE and GESS  
2100 S.E. Main Street, Suite 250  
Irvine, CA 927614  
USA  
Tel: 949-261-8433

SIGNATURE

Joseph W. Price

NAME

25,124

REGISTRATION NUMBER

June 7, 2001

DATE

NAK1-BP02

09/857721  
531 Rec'd PGT/ 07 JUN 2001

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re Application of:

Hideki Asida et al.

Serial No.:

Filed:

For: METHOD FOR PRODUCING METAL  
ELECTRODE

Examiner:

Group Art Unit:

Irvine, CA 92614

June 7, 2001

**PRELIMINARY AMENDMENT**

Assistant Commissioner for Patents  
Washington, D.C. 20231

Dear Sir:

Prior to an examination on the merits of the above-identified application, please enter the following amendments:

**IN THE CLAIMS:**

Please amend the claims as follows:

Claim 3, line 2, delete "Claims 1 and 2," and insert --Claim 1,--;

Claim 6, line 2, delete "Claims 1 and 2," and insert --Claim 1,--; and

Claim 10, line 3, delete "Claims 1, 2, and 7." and insert --Claim 1.--.

Please add the following newly-drafted Claims 11-14.

1           11.    The manufacturing methods for the metal electrodes according to Claim 2,  
2    wherein  
3                    in each of the second dry steps, the first layer and the second layer are dried by  
4    rapidly heating the layers so that an ambient temperature is increased at a rate of 10 to 40°C/min.

1           12.    The manufacturing methods for the metal electrode according to Claim 2, wherein  
2                    the first photosensitive substance consists of a mixture of an RuO black pigment,  
3    a metal including at least one type of metal selected among Ag, Cr, Cu, Al, Pt, and Ag-Pd, a  
4    photosensitive resin, and a solvent, as minimum ingredients, and  
5                    the second photosensitive substance consists of a mixture of metal including at  
6    least one type of metal selected among Ag, Cr, Cu, Al, Pt, and Ag-Pd, a photosensitive resin, and  
7    a solvent, as minimum ingredients.

1           13.    A manufacturing method for a plasma display panel comprising the  
2    manufacturing steps of the metal electrode according to Claim 2.

1           14.    A manufacturing method for a plasma display panel comprising the  
2    manufacturing steps of the metal electrode according to Claim 7.

## REMARKS


The amendments to the claims are to remove multiple dependencies.

Newly drafted Claims 11-14 are within the scope of the original invention and do not add any new subject matter.

If the Examiner believes that a telephone interview will help further the prosecution of this case, he is respectfully requested to contact the undersigned attorney at the listed telephone number.

Very truly yours,

PRICE AND GESS



---

Joseph W. Price, Reg. 251,24  
2100 S.E. Main St., Ste. 250  
Irvine, CA 92614  
949/261-8433

VERSION WITH MARKINGS TO SHOW CHANGES MADE

The claims have been amended as follows:

1           3.       (Amended) The manufacturing methods for the metal electrodes according to  
2 [Claims 1 and 2,] Claim 1, wherein  
3                   in each of the second dry steps, the first layer and the second layer are dried by  
4 rapidly heating the layers so that an ambient temperature is increased at a rate of 10 to 40°C/min.

1           6.       (Amended) The manufacturing methods for the metal electrode according to  
2 [Claims 1 and 2,] Claim 1, wherein  
3                   the first photosensitive substance consists of a mixture of an RuO black pigment,  
4 a metal including at least one type of metal selected among Ag, Cr, Cu, Al, Pt, and Ag-Pd, a  
5 photosensitive resin, and a solvent, as minimum ingredients, and  
6                   the second photosensitive substance consists of a mixture of metal including at  
7 least one type of metal selected among Ag, Cr, Cu, Al, Pt, and Ag-Pd, a photosensitive resin, and  
8 a solvent, as minimum ingredients.

1           10.     (Amended) A manufacturing method for a plasma display panel comprising  
2 the manufacturing steps of the metal electrode according to [Claims 1, 2, and 7.] Claim 1.

New Claims 11-14 have been added.

## DESCRIPTION

## METHOD FOR PRODUCING METAL ELECTRODE

Technical Field

5       The present invention relates to improvements in a method for producing a metal electrode used for a plasma display panel or the like.

Background Art

10       Fig. 14 shows an example of a conventional plasma display panel (hereafter called "PDP"). This figure is a perspective view, partly in cross section, of an AC PDP.

As shown in this figure, the AC PDP is composed of a front panel 75 and a back panel 85 which are opposed to each other. The front panel 75 is formed with a plurality of pairs of a stripe-shaped scanning electrode 71 and a stripe-shaped sustaining electrode 72 which are placed in parallel on a transparent first glass substrate 70 (an insulate substrate) and are covered by a dielectric layer 73 and a protective layer 74. The back panel 85 is formed with a plurality of stripe-shaped data electrodes 81 which are placed on a second glass substrate 80 (an insulate substrate), extend orthogonally to the scanning electrodes 71 and sustaining electrodes 72, and are covered by a dielectric layer 82. A plurality of stripe-shaped partition walls 83 are placed in parallel on the dielectric layer 82 so as to be located above and

15

20

25

between the data electrodes 81. Also, phosphor layers 84 in different colors are provided along sides of the partition walls 83.

5 A space formed between the front panel 75 and the back panel 85 is filled with an inert gas including one or more type of gases selected among He, Ne, Ar, Kr, and Xe as a discharge gas. In this space, a portion where the scanning electrode 71, the sustaining electrode 72, and the data electrode 81 intersect together constructs a  
10 light-emitting cell 90 (also referred to as a discharge space).

The scanning electrode 71 and the sustaining electrode 72 are made up of stripe-shaped conductive transparent electrodes 71a and 72a, and bus electrodes  
15 71b and 72b which are formed on the transparent electrodes, are narrower than the transparent electrodes, and include Ag. The data electrode 81 also includes Ag.

This AC PDP operates as follows. In a period for sustaining a driving operation after initialization and  
20 an address period, a pulse voltage is alternately applied to the scanning electrode 71 and the sustaining electrode 72. Then, an electric field developed between the protective layer 74 on the scanning electrode 71 across the dielectric layer 73 and the protective layer 74 on  
25 the sustaining electrode 72 across the dielectric layer 73 generates a sustaining discharge in the discharge space 90. Ultraviolet rays from this sustaining discharge



excite phosphors in the phosphor layer 84, which causes emission of visible light. This visible light forms an image on the panel.

Here, a method for forming the scanning electrode 5 71, the sustaining electrode 72, the dielectric layer 73, and the protective layer 74 on the first glass substrate will be briefly described. First, stripe-shaped conductive transparent electrodes 71a and 72a consisting of tin oxide or indium-tin oxide (ITO) are formed on the 10 first glass substrate 70. Then, a photosensitive paste including Ag is deposited thereon, patterned according to photolithographic method, and baked to form stripe-shaped bus electrodes 71b and 72b including Ag. Then, a dielectric glass paste is printed thereon and baked 15 to form the dielectric layer 73. After that, magnesium oxide (MgO) is deposited by evaporation to form the protective layer 74.

Next, a method for forming the data electrode 81, the dielectric layer 82, the partition wall 83, and the 20 phosphor layer 84 on the second glass substrate will be briefly described. First, a photosensitive paste including Ag is deposited on the second glass substrate 80, patterned according to a photolithography method, and baked to form stripe-shaped data electrodes 81 including 25 Ag. Then, a dielectric glass paste is printed thereon and baked to form the dielectric layer 82. After that, the partition walls are formed according to a screen-printing

method, a photolithography method, or the like, and the phosphor layers 84 are formed according to a screen-printing method, an ink-jet method, or the like.

Then, a glass member for seal is inserted between  
5 the peripheral portions of the front panel 75 and the back panel 85, and this glass member is fused and cooled so as to seal the both substrates. After that, exhausting and gas filling processes are conducted to complete the panel.

10 As stated above, the bus electrodes 71b and 72b and the data electrodes 81 are formed according to the photolithography method using an Ag photosensitive paste. The following describes these processes in detail using figures. Fig. 15 shows manufacturing processes in the  
15 photolithography method. In this figure, the method is explained by showing an example of the front panel.

First, ITO is deposited by evaporation onto the first glass substrate 70. Then, an Ag photosensitive paste is applied according to a printing method or the like to form  
20 an Ag photosensitive paste layer 100 (Fig. 15A). Next, a drying process is performed in order to drive off a solvent included in the Ag photosensitive paste layer 100.

Next, the layer 100 is exposed to ultraviolet radiation through a photolithographic mask 102 to form  
25 exposed regions 103 and unexposed regions 104 (Fig. 15B). This exposed regions serve as patterns of the bus electrodes in the finished products.

Next, a development process is performed to fix the exposed regions on the first glass substrate 70 (Fig. 15C). These fixed portions in the development process are referred to as a pre-baking electrode structure 105.

5       Next, the pre-baking electrode structure 105 is baked into the bus electrodes (Fig. 15D). In this process, the pre-baking electrode structure 105 is reduced in the size as can be seen from the comparison between Figs. 15C and 15D (Note that these figures are slightly exaggerated in their size for purposes of illustration).

10       In this way, a patterning process according to the photolithographic method using the Ag photosensitive paste is necessarily accompanied by the baking process in order to drive off a resin component in the paste. This process, however, has given rise to a problem of "edge curl phenomenon". It can be thought that this phenomenon mainly results from the action of the tensile force generated by heating.

15       Fig. 15D includes an enlarged view of the bus electrodes, which shows this edge curl phenomenon. The edge curl phenomenon, as shown in this figure, is a state where both sides of the pre-baking electrode structure 105 for the bus electrodes are warped upward against the first glass substrate after the baking process. When this phenomenon occurs, it becomes difficult to form the dielectric layer on the portions, and the dielectric layer formed on the portions becomes susceptible to an

electrical breakdown because the portions have sharp edges. To address the problem, the edge curl portions of the post-baked bus electrodes and data electrodes may be ground away.

5           Meanwhile, in case that the bus electrodes provided on the front panel are formed using a substance including Ag as above, incident light is reflected by the bus electrodes due to a relatively large reflectivity of Ag, which remarkably deteriorates a contrast in the image on  
10 the panel. To cope with this problem, an optically double-layered structure in which a black-white multiple layer and a white layer is laminated has been in practical use as the bus electrodes provided on the front panel. In this structure, the multiple layer configured so that  
15 a metal layer including a black pigment and a metal layer including Ag are laminated ("black-white multiple layer") is formed on the first glass substrate, and an Ag metal layer of low resistance ("white layer") is formed thereon.

          This double layered bus electrodes are also formed  
20 according to the photolithographic method as shown in Figs. 16A to 16F in the same manner as in the above single layer.

          That is, as shown in Fig. 16A, a photosensitive paste including a black pigment is applied to form a printed layer 110. Next, a drying process is performed to drive  
25 off a solvent from the printed layer 110.

          Next, as shown in Fig. 16B, an Ag photosensitive paste is applied to the surface of the printed layer 110

to form a printed layer 111. Next, a drying process is performed to drive off solvents from the printed layers 110 and 111.

Next, as shown in Fig. 16C, these layers are exposed to ultraviolet radiation through a photolithographic mask 113 to form exposed regions 114 and unexposed regions in the printed layers 110 and 111. These exposed regions serve as patterns of the black-white multiple layer in the finished products.

Note that the above Figs. 16A to 16C are slightly exaggerated in their film thicknesses or the like for the sake of clarity.

Next, a development process is performed to fix the exposed regions 114 on the first glass substrate 70 (Fig. 16D).

Next, a layer configured as lamination of a layer 116a including the black pigment and a layer 116b including Ag is baked into a black-white multiple layer 116 (Fig. 16E).

Next, as shown in Fig. 16F, a white layer 117 is applied according to a photolithographic method, a screen-printing method, or the like and baked to complete the bus electrodes.

As shown in the cross-sectional view, the black-white multiple layer in the process of Fig. 16E has the edge portions which are warped upward ("edge curled") so that a concave portion 116c is formed at the top of the

layer. Then, an Ag photosensitive paste is selectively applied to the concave portion 116c according to a photolithographic method, a screen-printing method, or the like, and this structure is baked again. As a result, as shown in Fig. 16F, a top surface of the electrode becomes flat in the finished bus electrode, so that an influence by the edge curl phenomenon in the black-white multiple layer can be substantially avoided.

This method provides advantages that an influence by the edge curl phenomenon can be substantially avoided as described above. However, a demand for a matter of convenience by performing the baking process only once cannot be satisfied by the above method.

#### Disclosure of the Invention

In view of the above-mentioned problems, the object of the invention is to provide a manufacturing method for a metal electrode used for a bus electrode, a data electrode, and the like which make up a display panel including a PDP by which, when these electrodes are patterned according to a photolithographic method, the edge curl phenomenon can be effectively controlled or substantially removed to the extent that the phenomenon is negligible.

As described above, the edge curl phenomenon results from the tensile force that acts on the pre-baking electrode structure during the baking process. That is,

the tensile force due to heat shrinkage acts on the both edge portions of the structure in all directions. If the tensile force that acts on the structure towards the middle portion of the structure becomes larger, the edge portions are warped upward by the force.

Therefore, in terms of the mechanism of the edge curl phenomenon, if a shape of the pre-baking electrode structure becomes so as to keep a balance of the tensile force, it can be thought that the edge curl phenomenon could be effectively controlled.

Then, the inventors have devised the shape of the pre-baking electrode structure, and have hit upon the invention to prevent the edge curl phenomenon.

More specifically, in order to achieve the above object, a method for producing a metal electrode according to the invention includes (a) a printing process in which a photosensitive substance consisting of a mixture of a metal, a photosensitive resin, and a solvent is printed to form a printed layer, (b) a drying process in which the printed layer is dried, (c) an exposing process in which the layer subjected to the drying process is exposed to light in a predetermined pattern, (d) a development process in which the layer subjected to the exposing process is developed to reveal an electrode pattern, and (e) a baking process in which the revealed electrode pattern is baked to shape a metal electrode. In such processes, the drying process is characterized in that

flows of the solvent occur from a region which has not dried to a region which has dried by heating the printed layer so that heated regions are unevenly distributed.

The above method for producing the metal electrode  
5 allows the shape of the pre-baking electrode structure to keep a balance of the tensile force due to heat shrinkage. Therefore, the edge curl phenomenon can be effectively controlled.

The above photosensitive substance may be a mixture  
10 of a metal including at least one type of metal selected from Ag, Cr, Cu, Al, Pt, and Ag-Pd, a photosensitive resin, and a solvent as minimum ingredients.

Also, the inventors had searched for a method for producing a metal electrode having an optically  
15 double-layered structure consisting of a so-called black-white multiple layer and a white layer, by which the edge curl phenomenon becomes substantially negligible (as described in the above "Background Art" section), while performing a baking process only once. As a result,  
20 the inventors have found a method by standing the phenomenon on its head and positively using the phenomenon.

That is, a manufacturing method for a metal electrode according to the invention includes a first print step  
25 for printing a first photosensitive substance that includes a mixture of a first metal, a photosensitive resin, and a solvent to form a first layer; a first dry step for



drying the first layer; a first exposure step for producing a predetermined pattern of a first region having a high solvent absorbency and a second region having a lower solvent absorbency than the first region by exposing the first region; a second print step for printing a second photosensitive substance that includes a mixture of a second metal, a photosensitive resin, and a solvent to form a second layer on the first layer, so that a region of the second layer on the first region converts into a third region having a low solvent content and a region of the second layer on the second region converts into a fourth region having a higher solvent content than the third region; a second dry step for drying the first and the second layers so that flows of the solvent from the first and the fourth regions to the third region occur; a second exposure step for exposing the second layer so as to leave the third region of the second layer in the following development step; a development step for developing the whole of the first and the second layers so as to leave the first and the third regions as an electrode pattern and to remove the remaining regions; and a baking step for baking the electrode pattern to shape the metal electrode.

In addition, a manufacturing method for a metal electrode according to the invention includes a first print step for printing a first photosensitive substance that includes a mixture of a first metal, a photosensitive

resin, and a solvent to form a first layer; a first dry  
step for producing a predetermined pattern of a first  
region having a high solvent absorbency and a second region  
having a lower solvent absorbency than the first region  
5 by heating the first region; a second print step for  
printing a second photosensitive substance that includes  
a mixture of a second metal, a photosensitive resin, and  
a solvent to form a second layer on the first layer, so  
that a region of the second layer on the first region  
10 converts into a third region having a low solvent content  
and a region of the second layer on the second region  
converts into a fourth region having a higher solvent  
content than the third region; a second dry step for drying  
the first and the second layers so that flows of the solvent  
15 from the first and the fourth regions to the third region  
occur; an exposure step for exposing the whole of the first  
and the second layers so as to leave the first and the  
third regions in the following development step; a  
development step for developing the whole of the first  
20 and the second layers so as to leave the first and the  
third regions as an electrode pattern and to remove the  
remaining regions; and a baking step for baking the  
electrode pattern to shape the metal electrode.

According to the above manufacturing methods for the  
25 metal electrode, the edge portions of the printed layer  
formed in the first printing process and subjected to a  
baking process are warped upward, so that concave portion

having an arc-shaped curve is formed at the top of the layer. The printed layer formed in the second printing process has a domical shape in which the bottom has a swell portion which swells downward in the arc shape and the top has a flat portion. Therefore, after the baking process, the second printed layer fits into the concave portion of the first printed layer. In this way, the edge portions of the first printed layer, which are warped upward, contact the curved portion in the domical shape, and the electrode on the whole has a substantially flat top surface, which prevents the warped edge portions from being exposed. Thus, the edge curl phenomenon can be substantially removed by the above method, which includes a baking process only once.

Here, the photosensitive paste used in the first and second printing processes may include the same metal or different metals. In an embodiment which will be described later, the first printing process corresponds to a process as shown in Fig. 5B in which a printed layer 42 is printed, while the second printing process corresponding to a process as shown in Fig. 5D in which a printed layer 46 is printed.

In these processes, the first photosensitive substance may be a mixture of an RuO black pigment, a metal including at least one type of metal selected from Ag, Cr, Cu, Al, Pt, and Ag-Pd, and a solvent as minimum ingredients, while the second photosensitive substance

may be a mixture of a metal including at least one type of metal selected from Ag, Cr, Cu, Al, Pt, and Ag-Pd, a photosensitive resin, and a solvent as minimum ingredients.

5

#### Brief Description Of The Drawings

Fig. 1 is a perspective view showing the construction of an AC PDP according to the first embodiment of the invention.

10

Fig. 2 is a part of vertical sectional view taken along line A-A' of Fig. 1, which shows cross-sectional shapes of the scanning electrode and the sustaining electrode along their short side directions.

15

Fig. 3 is a part of vertical sectional view taken along line B-B' of Fig. 1, which shows a cross-sectional shape of the data electrode along the short side direction.

20

Fig. 4 is a vertical sectional view taken along line C-C' (a line running a region including both transparent electrode and bus electrode) of Fig. 1 along the longitudinal direction of the scanning electrode 11.

Fig. 5 shows processes by which a bus electrode is manufactured in this order.

Fig. 6 shows processes by which a data electrode is manufactured in this order.

25

Fig. 7 shows a state of the pre-baking electrode structure during a baking process, which shows that the edge portions are being warped upward by the action of

the tensile force with the passage of time.

Fig. 8 is schematic diagrams showing a mechanism to make the pre-baking white layer a domical shape.

Fig. 9 is schematic diagrams showing a mechanism to make the pre-baking electrode structure a domical shape.

Figs. 10-12 show example modifications of the method for producing the bus electrode and the data electrode.

Fig. 13 shows a characteristic curve indicating a relationship between light exposure and dissolubility of the printed layer in a developer.

Fig. 14 is a perspective view showing the construction of a conventional PDP.

Fig. 15 shows processes in a conventional method for producing a bus electrode (single layer) and a data electrode.

Fig. 16 shows processes in a conventional method for producing a bus electrode (optically double-layered structure).

## Best Mode for Carrying Out the Invention

### First Embodiment

[Construction of the Panel]

Fig. 1 is a perspective view showing the construction of an AC PDP according to the first embodiment of the invention.

As shown in this figure, the AC PDP is composed of a front panel 15 and a back panel 25 which are opposed

to each other. The front panel 15 is formed with a plurality of pairs of a stripe-shaped scanning electrode 11 and a stripe-shaped sustaining electrode 12 which are placed in parallel on a transparent first glass substrate 10 and are covered by a dielectric layer 13 and a protective layer 14. The back panel 25 is formed with a plurality of stripe-shaped data electrodes 21 which are placed on a second glass substrate 20, extend orthogonally to the scanning electrodes 11 and sustaining electrodes 12, and are covered by a dielectric layer 22. A plurality of stripe-shaped partition walls 23 are placed in parallel on the dielectric layer 22 so as to be located above and between the data electrodes 21. Also, phosphor layers 24 in different colors are provided along sides of the partition walls 23. Note that, in this specification, the first glass substrate side of the front panel and the second glass substrate side of the back panel are respectively referred to as "downward" for the sake of convenience.

A space formed between the front panel 15 and the back panel 25 is filled with an inert gas including one or more type of gases selected among He, Ne, Ar, Kr, and Xe as a discharge gas. In this space, a portion where the scanning electrode 11, the sustaining electrode 12, and the data electrode 21 intersect together constructs a light-emitting cell 30.

Fig. 2 is a part of vertical sectional view taken

along line A-A' of Fig. 1, which shows cross-sectional shapes of the scanning electrode and the sustaining electrode along the short side directions.

The scanning electrode 11 and the sustaining electrode 12, respectively, consist of stripe-shaped transparent electrodes 11a and 12a, stripe-shaped first black conductive layers 11b and 12b which are narrower than the transparent electrodes, low-resistance second conductive layers 11c and 12c (the first conductive layer 11b and the second conductive layer 11c are referred to as a "black-white multiple layer 11d", while the first conductive layer 12b and the second conductive layer 12c are referred to as a "black-white multiple layer 12d"), and the third conductive layers 11e and 12e (hereafter called "white layers 11e and 12e"), which are laminated in this order. In this way, in terms of the function (especially, optical function) for the metal electrode to absorb the incident light, the first embodiment is the same as conventional one in that a metal electrode is made up of the optically double-layered structure which consists of the black-white multiple layer and the white layer. Hereafter, the electrode structures, in which the black-white multiple layer 11d and the white layer 11e, and the black-white multiple layer 12d and the white layer 12e are laminated, are referred to as a bus electrode 11f and a bus electrode 12f.

The edge portions 11d1 and 12d1 of the black-white

multiple layers 11d and 12d are warped upward and concave portions 11d2 and 12d2 having arc-shaped curves are formed at their top. The white layers 11e and 12e are shaped like a dome, in which bottoms have swell portions 11e1 and 12e1 which swell downward in the arc shape and tops have flat portions 11e2 and 12e2. The white layers 11e and 12e having the above distinctive shapes fit into the black-white multiple layers 11d and 12d respectively, so that the swell portion 11e1 (12e1) and the concave portion 11d2 (12d2) are mutually matching.

Fig. 3 is a part of vertical sectional view taken along line B-B' of Fig. 1, which shows a cross-sectional shape of the data electrode along the short side direction.

As shown in this figure, the data electrode 21 is a single layer and has a dome shape, in which the center portion is the thickest and swells upward against the substrate and the thickness is decreased in a curvature with increasing proximity to the edge portions. This shape of the data electrode results from the manufacturing method which will be described later.

The following describes the construction of the periphery of the above-mentioned AC PDP.

Fig. 4 is a vertical sectional view taken along line C-C' (a line running a region including both transparent electrode and bus electrode) of Fig. 1 along the longitudinal direction of the scanning electrode 11, which shows the peripheral portion of the panel (not shown



in Fig. 1). Note that the following description applies to not only the scanning electrode 11 but also the sustaining electrode 12, because they have the same construction.

5 As shown in this figure, the end portion 11e3 (12e3) of the stripe-shaped third conductive layer 11e (12e) along the longitudinal direction of the stripe is prolonged to the periphery 10a of the first glass substrate so as to connect to the external circuit (not shown). The data electrode 21 is also prolonged to the periphery of the second glass substrate so as to connect to the external circuit, which is not illustrated.

#### [Method for Manufacturing the Panel]

15 Basically, the panel can be manufactured according to a well-known method such as the method described in the above "Background Art" section. The following describes a method for manufacturing some components which are specific to the embodiment of the invention.

20

#### A) Method for Manufacturing Bus Electrodes 11f and 12f:

The bus electrodes 11f and 12f are manufactured as follows. Fig. 5 shows their processes.

25 As shown in Fig. 5A, a photosensitive paste 40a is printed like a film (i.e., layer) on the top surface of the first glass substrate 10 on which the transparent electrodes 11a and 12a have been formed so as to cover

the transparent electrodes 11a and 12a, whereby a printed layer 41 is formed. This photosensitive paste consists of a mixture of a black pigment, a photopolymerizability monomer, a polymerization initiator, a solvent, a glass component, and the like. Ruthenium tetroxide or a multiple oxide of ruthenium can be used as the black pigment. In addition, it is possible to blacken the electrode using a mixture of Ag and an inorganic pigment such as Fe, Ni, Co, and so on. In this case, however, when a glass substrate manufactured according to a float process, which is generally employed, is used as the first glass substrate, Ag is diffused into the glass substrate during the following baking process because tin is diffused and implanted into the surface of the glass substrate. This diffusion gives rise to a problem of yellowing of the glass substrate. Therefore, it is preferable to use ruthenium tetroxide or the like as above. The photopolymerizability monomer is not limited to a specific type, but acrylate or the like may be used. Diethylene glycol or the like may be used as the solvent.

Next, after drying the printed layer to drive off the solvent as shown in Fig. 5B, a photosensitive paste 40b is printed like a film (i.e., layer) so as to cover the printed layer 41 to form a printed layer 42. This photosensitive paste 40b consists of a mixture of a metal such as Ag, Cr, and Cu which has a low resistance and an enough transparency, a polymerization initiator, a

photopolymerizability monomer, a solvent, a glass component, and the like.

Next, after drying the printed layer 42 to drive off the solvent as shown in Fig. 5C, a photolithographic mask 43a with a plurality of slits 43a1 in a predetermined pattern is placed above the printed layer 42 with a space of 100  $\mu$ m between them. Then, the top surface of the printed layers 42 is exposed to ultraviolet radiation 44 through the photolithographic mask 43. This induces a crosslinking reaction in the photopolymerizability monomer included in the portion of the printed layers 41 and 42 under the exposed region. These printed layers 41 and 42 which were subjected to the exposure process hereafter will be called "printed-exposed layer" 45 for convenience.

Next, as shown in Fig. 5D, the above photosensitive paste 40b is printed like a film (i.e., layer) so as to cover the printed-exposed layer 45 to form a printed layer 46. In the printed layer 46, a portion 46a' located on the exposed region 45a in the printed-exposed layer 45 is recessed downward (to the substrate side) as shown in Fig. 5(d). Here, since the white layer located in the top of the bus electrode is prolonged to the periphery of the panel beyond the display area, the photosensitive paste 40b is applied so as to cover the peripheral portion of the layer.

Next, the printed layer 46 is dried in a

predetermined temperature profile to drive off the solvent (Fig. 5E). In the drying process, the temperature profile is determined so that the recessed portion 46a' (Fig. 5D) becomes swelling like a domical shape. More specifically, this may be a profile of rising an ambient temperature to approximately 80 to 110°C at a rate of 10 to 40°C/min and keeping the temperature during a fixed time period as one example. As a result, the recessed portion before the drying process can be swelled like a domical shape by the mechanism which will be described later. Note that this temperature profile is important to form the domical shaped portion and ordinary used drying conditions cannot realize this state.

Next, as shown in Fig. 5F, a photolithographic mask 43b with a plurality of slits 43b1 in a predetermined pattern (this slit is formed corresponding to the recessed portion 46a') is placed above the printed layer 46 with a space of 100  $\mu$ m between them. Then, the printed layer 46 is exposed to ultraviolet radiation 44 through the mask. This printed layer 46 which were subjected to the exposure process hereafter will be called "printed-exposed layer 47" for convenience. Note that, in these figures, the illustration of their film thickness and the like are exaggerated for clarity.

Next, as shown in Fig. 5G, a development process is performed to both of the printed-exposed layers 45 and 47 using a suitable solution (for example, an  $\text{Na}_2\text{CO}_3$

solution or the like) to fix a bus electrode pattern. The strata fixed after the development process will be called "pre-baking electrode structure 48" for convenience. Also, in this pre-baking electrode structure 48, a portion which will become a black-white multiple layer and a portion which will become a white layer will be called a "pre-baking black-white multiple layer 48a" and a "pre-baking white layer 48b", respectively.

After that, polymers generated by the crosslinking reaction and remaining monomers which have not yet reacted are dissipated by baking the pre-baking electrode structure at a predetermined temperature of 600°C (Fig. 5H). Thereby, bus electrodes 11f and 12f are completed. In the baking process, the size of the bus electrodes 11f and 12f are naturally reduced as compared to the pre-baking electrode structure 48.

Although the exposure pattern of the printed layers 41 and 42 can be formed at the same time as described above, this patterning process may be individually performed to each layer.

#### B) Method for Manufacturing Data Electrode 21:

The data electrode 21 is manufactured as follows. Fig. 6 shows their processes.

First, as shown in Fig. 6A, a photosensitive paste 50a is printed like a film (i.e., layer) on the top surface of the second glass substrate 20 to form a printed layer

51. The photosensitive paste 50a consists of a mixture of a metal such as Ag, Cr, and Cu which has a low resistance and an enough transparency, a polymerization initiator, a photopolymerizability monomer, a solvent, a glass component, and the like. The photopolymerizability monomer is not limited to a specific type, but acrylate or the like may be used like the above example. Diethylene glycol or the like may be used as the solvent. Since the data electrode 21 is prolonged to the periphery of the panel beyond the display area, the photosensitive paste 50a should be applied substantially all over the surface of the second glass substrate so as to cover the peripheral portion.

Then, as shown in Fig. 6B, a laser beam 52 is irradiated while being scanned to a predetermined pattern (the same pattern as the data electrode 21) of the surface of the printed layer 51 so that the region where the data electrode 21 is to be formed is selectively dried. In this way, a plurality of stripe-shaped dry regions 53 are formed by irradiating the regions with laser beams 52. Note that, although only one stripe is illustrated in this figure, the number, which is equivalent to the data electrodes, of stripe-shaped regions are formed in fact. This stripe-shaped region 53 is shaped like a dome in which the center portion is swelled.

Next, as shown in Fig. 6C, this stripe-shaped region 53 is exposed to ultraviolet radiation 54 through a

photolithographic mask 55 with a plurality of slits 55a corresponding to the stripe-shaped regions.

Next, as shown in Fig. 6D, a development process is performed to the printed layer using a suitable solution (for example, an  $\text{Na}_2\text{CO}_3$  solution or the like) so that only the strip-shaped region 56 whose cross section is shaped like a dome is fixed on the surface of the second glass substrate 20. This region subjected to the development process will be called a "pre-baking electrode structure"

57.

Next, this structure is baked at a predetermined temperature (e.g.,  $600^\circ\text{C}$ ) to drive off polymers generated by the crosslinking reaction and the solvent used in the development process. Thereby, the data electrode 21 is completed (Fig. 6E). In the baking process, the size of the data electrode 21 is naturally reduced as compared to the pre-baking electrode structure 57.

#### [Functions and Effects]

The following describes specific functions and effects obtained by adopting the above methods.

#### A) Specific Functions and Effects of the Manufacturing Method of the Bus Electrode:

The following functions and effects can be obtained by manufacturing a bus electrode in the above manner. The pre-baking electrode structure 48 is formed as an

intermediate of the bus electrode in the above processes. This structure 48, as shown in the cross-sectional view of Fig. 5G, is configured so that the pre-baking white layer 48b having a domical shape is laminated on the  
5 pre-baking black-white multiple layer 48a having a rectangular shape.

Now, Fig. 7 shows a state of the pre-baking electrode structure during a baking process, which illustrates that the edge portions are being warped upward by the action  
10 of the tensile force with the passage of time. The baking process proceeds in order of A, B, and C in Fig. 7.

Originally, the structure has the shape shown in Fig. 7A, then it is gradually warped upward with the progress of the baking process as shown in Fig. 7B. Finally, as  
15 shown in Fig. 7C, the edge portions of the black-white multiple layers 11d and 12d are warped upward and concave portions 11d2 and 12d2 having arc-shaped curves are formed at their top. Then, the white layers 11e and 12e become domical shapes in which bottoms have swell portions 11e1  
20 and 12e1 which swell downward in the arc shape and tops have flat portions 11e2 and 12e2. Those layers 11e and 12e fit into the concave portions 11d2 and 12d2 of the black-white multiple layers 11d and 12d respectively. In this way, the edge portions 11d1 and 12d1 of the  
25 black-white multiple layers, which are warped upward, contact the curved portions of the swell portions 11e1 and 12e1, and the electrodes on the whole have flat top



surfaces 11e2 and 12e2, which prevents the warped edge portions 11d1 and 12d1 from being protruded and exposed.

When the baking process started, a resin component and the like included in the pre-baking electrode structure 48 start to be driven off. As a result, the pre-baking black-white multiple layer 48a shrinks along the horizontal and depth directions of the substrate. This shrinkage produces tensile forces P1 and P2 along the horizontal and depth directions of the substrate. These tensile forces produce a force P3 which acts from the edge portion 48a1 to the center line of the pre-baking black-white multiple layer 48a so as to warp the edge portion 48a1 upward.

As a result, as shown in Fig. 7B, the edge portion 48a1 of the pre-baking black-white multiple layer 48a is gradually warped upward. At the same time, the force P3 lets the pre-baking white layer 48b laminated on the layer 48a warp downward. Therefore, the pre-baking white layer 48b is gradually warped downward, so that it swells in the opposite direction to the pre-baking structure and becomes thinner in the depth direction, whereby it changes into a shape like a dome having a flat top surface.

Now, the reason why the pre-baking white layer 48b has a domical shape will be examined in detail. Fig. 8 schematically shows the mechanism.

The exposed region 45a in the printed-exposed layer 45 has a higher absorbency of the solution than the

unexposed regions 45b, because the photopolymerizability monomers included there were polymerized by the crosslinking reaction so that both dense and sparse regions are formed. Therefore, as shown in Fig. 8A, the portion corresponding to the exposed region 45a becomes a region 45c having a higher absorbency of the solution, while the portions corresponding to the unexposed regions 45b become regions 45d having a lower absorbency than the region 45c.

As a result, as shown in Fig. 8B, a concave portion is formed at the surface of the printed layer 46 which is printed on the printed-exposed layer 45, because the solvent included in the portion of the printed layer 46 on the exposed region 45a is selectively absorbed into the exposed region 45a. Thus, in the printed layer 46, the portion on the exposed region 45a becomes a region 46a being low in solvent content, while the portions on the unexposed regions 45b become regions 46b being higher in solvent content than 46a. These regions 46a and 46b are formed corresponding to the exposure pattern of the printed-exposed layer 45. In this case, these regions are formed in a stripe shape so that they are alternately arranged and in parallel.

After that, the printed layer 46 is dried. In a conventional process, the solvent included in the printed layer is driven off in a so-called "static" state so that any flows of the solvent do not occur in the layer. In

the embodiment of the invention, however, as shown in Fig. 8C, flows F1, F2, and F3 of the solvent occur in the horizontal and depth directions of the layer 46. When heated, the flows F1 and F2 is generated by the gradient of the solvent content between the region 46a being low in solvent content and the region 46b being higher in solvent content. The flow F3 occurs when the solvent flowed into the region 45c having a higher absorbency of the solution under the region 46a goes upward.

Meanwhile, a metal also flows into the region 46a with the flows F1 and F2 of the solvent. As a result, the metal density of the region 46a increases with the progress of the drying process, while the metal flows to the center portion of the region in accordance with the flows F1, F2, and F3 of the solvent, so that the metal is deposited on the top of the region. Thereby, as shown in Fig. 8C, the center portion of the region is finally swelled upward.

Since the flow of the solvent must generate during the drying process as above, it is preferable to use a solvent which is difficult to vaporize in a room temperature and whose boiling point is relatively high (this also applies to the following manufacturing method of the data electrode).

In the embodiment, the drying process is performed so that the top layer has a domical shape. However, if a drying process is performed so that the middle layer (i.e., printed layer 42) is swelled upward in the center

portion, then the top layer laminated on the middle layer must have a swell portion corresponding to the middle layer. Therefore, this method is also feasible.

5 B) Specific Functions and Effects of the Manufacturing Method of the Data Electrode:

As shown in Fig. 6D, which shows the cross section of the pre-baking electrode structure 57, the structure has a domical shape in which the center portion is the  
10 thickest and the thickness is decreased in a curvature with increasing proximity to the edge portions.

It can be thought that this domical shape of the pre-baking electrode structure 57 allows the tensile forces acting on the pre-baking electrode structure due  
15 to the heat shrinkage to be balanced and suppresses the edge curl phenomenon.

Here, the effect to suppress the edge curl phenomenon depends on the difference between the film thickness L1 of the center portion of the pre-baking electrode  
20 structure 57 and the film thickness L2 of the edge portion (See Fig. 6D). As a result of the inventor's experiment, clear effects can be obtained when the difference between L1 and L2 was at least  $2\mu\text{m}$ .

Now, the reason why the domical shape is formed will  
25 be considered in detail. Fig. 9 schematically shows the mechanism.

As shown in Fig. 9A, a laser beam 52 is irradiated

to a specified portion of the surface of the printed layer 51 which is still wet, so that mainly a solvent is driven off from the irradiated region 51a. In accordance with this state, the flows of the solvent F4 and F5 occur so that the solvent flows from the non-irradiated regions 51b to the irradiated region 51a. This is because the absorbency of the solvent becomes higher in the irradiated region 51a because the solvent included in the region has been driven off. That is, two regions which are different from each other in their solvent content are formed. In this case, the metal also moves with the flows of the solvent.

As a result, the metal density of the irradiated region 51a increases with the progress of the drying process, while the metal flows to the center portion of the region in accordance with the flows F4 and F5 of the solvent, so that the metal is deposited on the top of the region. Thereby, as shown in Fig. 9B, the center portion of the region is finally swelled upward.

This domical shape not only suppress the edge curl phenomenon, but also realize a relatively large cross-sectional area. Therefore, considering that the resistance of the electrode should be reduced, this shape is preferable. In addition, this shape can be formed according to the above simple method, so that this is of much practical use.

[Modifications]

- In the drying process of the above embodiments, the printed layer 46 is uniformly heated all over the surface or the printed layer 51 is selectively heated by laser beams. In addition to these heating process, as shown in Figs. 10 and 11, the surface of the region not having the domical shape is covered with a member 60 having impermeability to the solvent so as to drive off the solvent from the surface of the domical shaped region, and not from the other surface. With this method, the flows of the solvent F1, F2, F4, and F5 along the horizontal direction of those printed layers effectively occur, so that the domical shape can be effectively formed.

- The method for forming a domical shape of the white layer after the drying process is not limited to the above method. This shape can be formed in the following manner. The following describes different points between the methods.

Fig. 12 shows the processes. In the above embodiment, two regions which are different from each other in their absorbency of the solvent are formed by exposing the printed layer 45 to light. However, in this modification, the two regions are formed by selectively drying the specified regions of the printed layer 45. That is, as shown in Fig. 12A, laser beams are irradiated to the region which is to be left as the electrode of the printed layer 42, so that the region is selectively dried

and the absorbency of the solvent becomes higher in the region.

When the printed layer 46 is printed on the printed layer 42, the solvent included in the portion of the printed layer 46 which is located on the irradiated region is absorbed into the selectively dried region. As a result, as shown in Fig. 12B, this portion becomes the region 46a being low in solvent content, while the portions on regions not being subjected to the drying treatment in the printed layer 42 become regions 46b being higher in solvent content.

After that, the metal electrodes are completed according to substantially the same manner in the above embodiments. In this case, the printed layers for the black-white multiple layer and the white layer are subjected to exposure and development processes at the same time.

### Second Embodiment

The second embodiment is different from the first embodiment in that exposure values are different from each other in the exposure processes shown in Figs. 5C and 5F.

Suppose that the exposure value is D1 when the printed layers which become the first conductive layers 11b and 12b and the second conductive layers 11c and 12c are exposed to light, while the exposure value is D2 when the printed layers which become the third conductive

layers 11e and 12e (white layers) are exposed to light. Then, the exposure values D1 and D2 satisfy the relationship of  $D1 > D2$ .

When the exposure value for exposing the printed layer for the white layer to light is set at lower than the printed layer for the black-white layer, it becomes possible to appropriately control the film thickness of the white layer, which allows the total film thickness of the metal electrode to be appropriately controlled.

This is because there is the following relationship between the exposure value and the dissolubility of the printed-exposed layer in a developer. That is, when the photosensitive paste after the drying process is exposed to light, the photosensitive component is polymerized by a crosslinking reaction. Such a polymerized portion has generally a lower dissolubility to the developer as compared to the unexposed regions. Therefore, the film thickness after the development process can be altered by changing the exposure value.

Fig. 13 shows a characteristic curve indicating a relationship between light exposure and dissolubility of the printed layer in a developer. The horizontal axis shows the exposure value ( $\text{mJ}/\text{cm}^2$ ), and the vertical axis shows the dissolution rate ( $\mu\text{m}/\text{sec}$ ). This experimental result was obtained by immersing the substrate, to which the photosensitive paste is applied, in the developer and measuring the remaining film thickness per unit of time.



As shown in this Fig. 13, the dissolution rate is gradually decreased with increasing the light exposure not more than 300mJ/cm<sup>2</sup>. When the light exposure is more than 300mJ/cm<sup>2</sup>, the dissolution rate does not change very much with increasing the light exposure. From this observation, the film thickness after the development process can be altered by setting two exposure values. More specifically, in the case of Fig. 13, two values may be selected with setting a boarder of 300mJ/cm<sup>2</sup>.

As stated above, the film thickness after the development process can be controlled by suitably changing the exposure value. With this method, if the properties of panels which were manufactured in the same condition are uneven, this unevenness can be easily corrected by fine-tuning the light exposure.

For information, the following Table 1 shows the film thicknesses of the black-white multiple layer and the white layer when the exposure values D1 and D2 are changed. It is apparent from this result also that adjustment of the light exposure is effective in controlling the film thickness.

[Table 1]

	Light Exposure D 1 (mJ / cm <sup>2</sup> )	Light Exposure D 2 (mJ / cm <sup>2</sup> )	Black-White Multiple Layer (μm)	White Layer (μm)
Case 1	5 0 0	1 0 0	5. 0	4. 8
Case 2	4 0 0	2 0 0	5. 1	6. 8
Case 3	4 0 0	1 0 0	5. 3	5. 0
Case 4	3 0 0	1 0 0	5. 1	5. 2

Case 5	3 0 0	5 0	5. 1	3. 2
Case 6	3 0 0	3 0 0	5. 1	8. 4

Here, since the above example deals with the case for making the white layer thinner, the light exposure condition is set at  $D1 > D2$ . However, in the case of  $D1 < D2$ ,  
5 the white layer can be formed thicker.

Besides, if the exposure process is individually performed to each of the first and the second conductive layers unlike the above embodiments, the exposure value can be controlled for each of the first, second, third  
10 conductive layers. In this case, each film thickness can be appropriately controlled.

#### Industrial Applicability

The invention offers an excellent industrial  
15 applicability, because metal electrodes in display panels such as PDPs can be manufactured with great productivity.

## CLAIMS

1. A manufacturing method for a metal electrode whose  
5 structure consists of multiple layers of one or more types  
of metal, comprising:

a first print step for printing a first  
photosensitive substance that includes a mixture of a  
first metal, a photosensitive resin, and a solvent to form  
10 a first layer;

a first dry step for drying the first layer;

a first exposure step for producing a predetermined  
pattern of a first region having a high solvent absorbency  
and a second region having a lower solvent absorbency than  
15 the first region by exposing the first region;

a second print step for printing a second  
photosensitive substance that includes a mixture of a  
second metal, a photosensitive resin, and a solvent to  
form a second layer on the first layer, so that a region  
20 of the second layer on the first region converts into a  
third region having a low solvent content and a region  
of the second layer on the second region converts into  
a fourth region having a higher solvent content than the  
third region;

25 a second dry step for drying the first and the second  
layers so that flows of the solvent from the first and  
the fourth regions to the third region occur;

a second exposure step for exposing the second layer so as to leave the third region of the second layer in the following development step;

5 a development step for developing the whole of the first and the second layers so as to leave the first and the third regions as an electrode pattern and to remove the remaining regions; and

a baking step for baking the electrode pattern to shape the metal electrode.

10

2. A manufacturing method for a metal electrode whose structure consists of multiple layers of one or more types of metal, comprising:

15 a first print step for printing a first photosensitive substance that includes a mixture of a first metal, a photosensitive resin, and a solvent to form a first layer;

20 a first dry step for producing a predetermined pattern of a first region having a high solvent absorbency and a second region having a lower solvent absorbency than the first region by heating the first region;

25 a second print step for printing a second photosensitive substance that includes a mixture of a second metal, a photosensitive resin, and a solvent to form a second layer on the first layer, so that a region of the second layer on the first region converts into a third region having a low solvent content and a region

of the second layer on the second region converts into a fourth region having a higher solvent content than the third region;

5 a second dry step for drying the first and the second layers so that flows of the solvent from the first and the fourth regions to the third region occur;

an exposure step for exposing the whole of the first and the second layers so as to leave the first and the third regions in the following development step;

10 a development step for developing the whole of the first and the second layers so as to leave the first and the third regions as an electrode pattern and to remove the remaining regions; and

15 a baking step for baking the electrode pattern to shape the metal electrode.

3. The manufacturing methods for the metal electrodes according to Claims 1 and 2, wherein

20 in each of the second dry steps, the first layer and the second layer are dried by rapidly heating the layers so that an ambient temperature is increased at a rate of 10 to 40°C/min.

4. The manufacturing methods for the metal electrodes according to Claim 3, wherein

25 in each of the second dry steps, the first layer and the second layer are dried with a member having

impermeability to the solvent being arranged on the surface of the fourth region.

5. The manufacturing method for the metal electrode  
5 according to Claim 1, wherein

exposure values of the first exposure step and the second exposure step are different from each other, so that the dissolubility of the first layer and the second layer in the development process can be controlled,  
10 whereby film thickness of each of the first layer and the second layer is controlled.

6. The manufacturing methods for the metal electrode  
according to Claims 1 and 2, wherein

15 the first photosensitive substance consists of a mixture of an RuO black pigment, a metal including at least one type of metal selected among Ag, Cr, Cu, Al, Pt, and Ag-Pd, a photosensitive resin, and a solvent, as minimum ingredients, and

20 the second photosensitive substance consists of a mixture of a metal including at least one type of metal selected among Ag, Cr, Cu, Al, Pt, and Ag-Pd, a photosensitive resin, and a solvent, as minimum ingredients.

25 7. A manufacturing method for a metal electrode, comprising:

a print step for printing a photosensitive substance that includes a mixture of a metal, a photosensitive resin, and a solvent to form a layer;

a dry step for drying the layer;

5 an exposure step for exposing the layer in a predetermined pattern;

a development step for developing the layer to reveal an electrode pattern; and

10 a baking step for baking the revealed electrode pattern to shape the metal electrode,

wherein, in the dry step, the layer is heated so that a flow of the solvent from a region being still wet and a dry region occurs.

15 8. The manufacturing method for the metal electrode according to Claim 7, wherein

in the dry step, a laser beam is irradiated to a portion which is to become an electrode so as to dry the portion.

20

9. The manufacturing method for the metal electrode according to Claim 7, wherein

the photosensitive substance consists of a mixture of a metal including at least one type of metal selected among Ag, Cr, Cu, Al, Pt, and Ag-Pd, a photosensitive resin, 25 and a solvent, as minimum ingredients.

10. A manufacturing method for a plasma display panel comprising the manufacturing steps of the metal electrode according to Claims 1, 2, and 7.



# ABSTRACT

A manufacturing method for a metal electrode used for a bus electrode, a data electrode, and the like which make up a display panel including a PDP(Plasma Display Panel) by which, when these electrodes are patterned according to a photolithographic method, the edge curl phenomenon can be substantially controlled to the extent that the phenomenon is negligible. The manufacturing method of the invention therefore includes a dry step for drying the layers making up the metal electrode so that flows (F1, F2, and F3) of the solvent occur from a region having a high absorbency of the solvent to a region having a lower absorbency of the solvent.

FIG.1

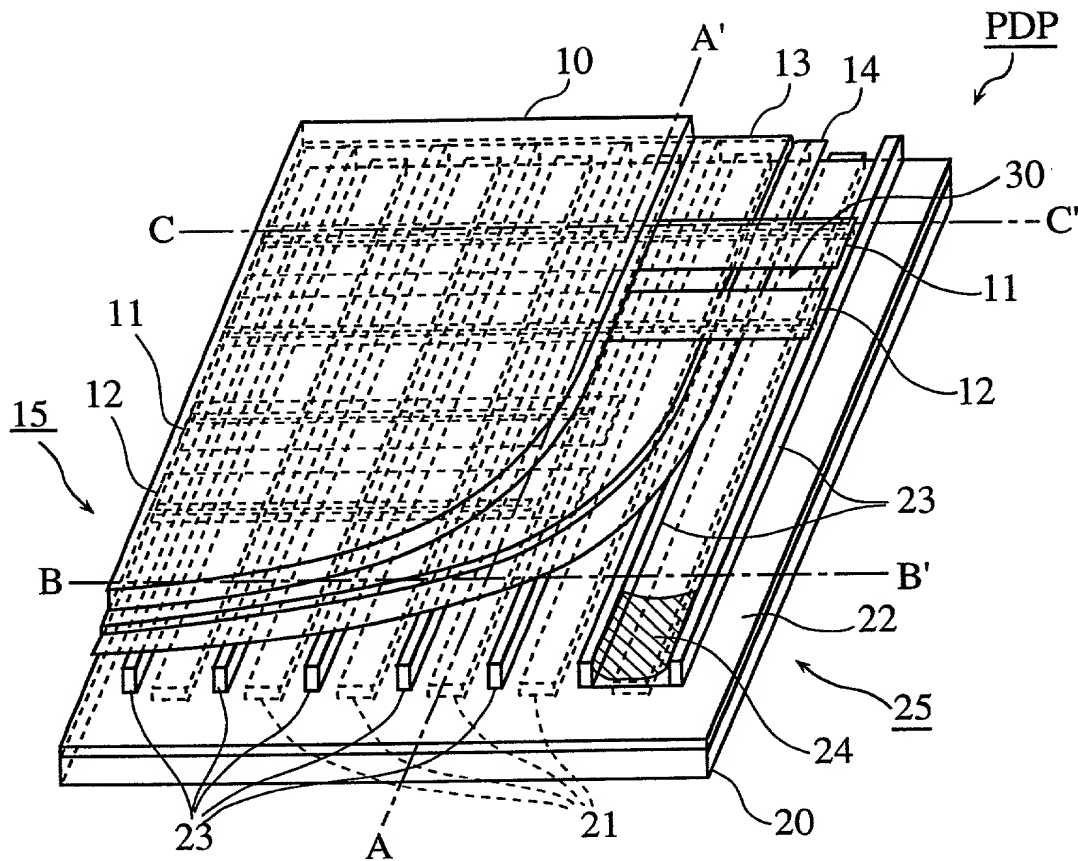


FIG. 2

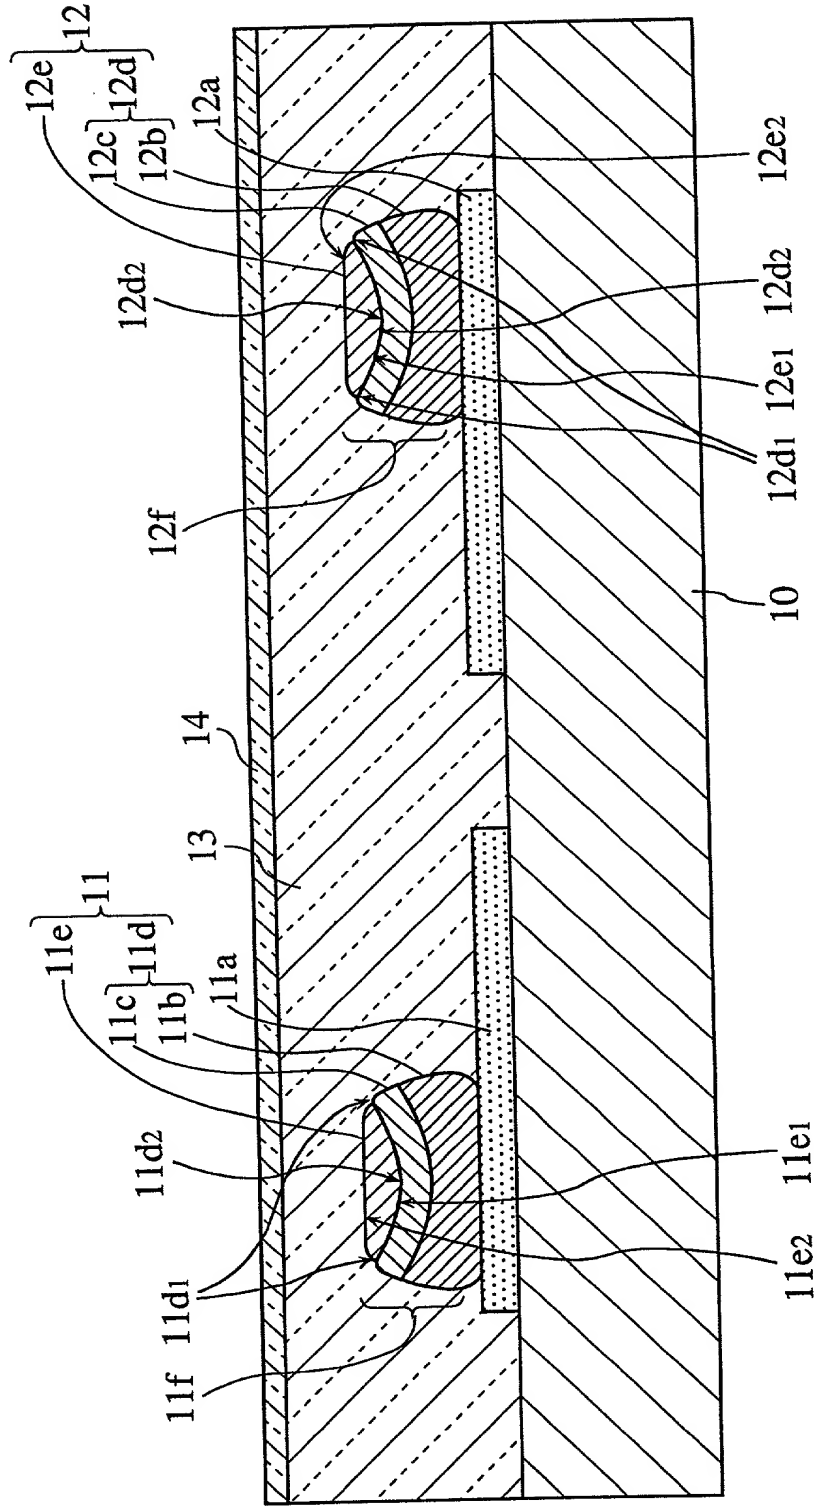


FIG.3

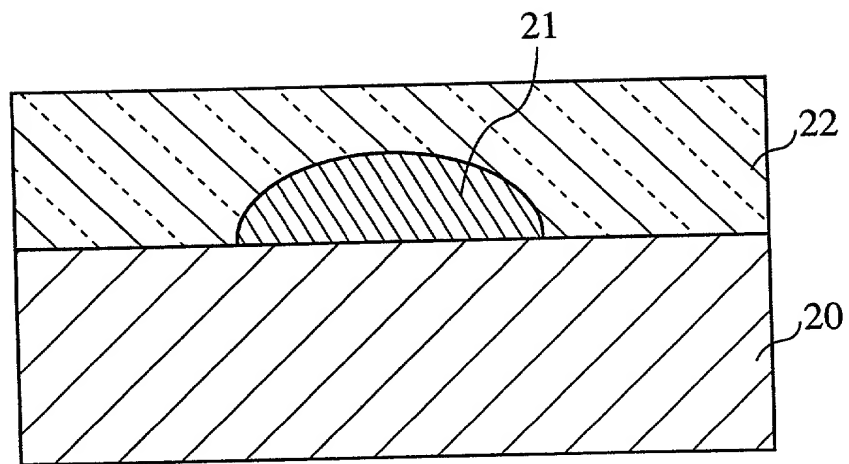


FIG.4

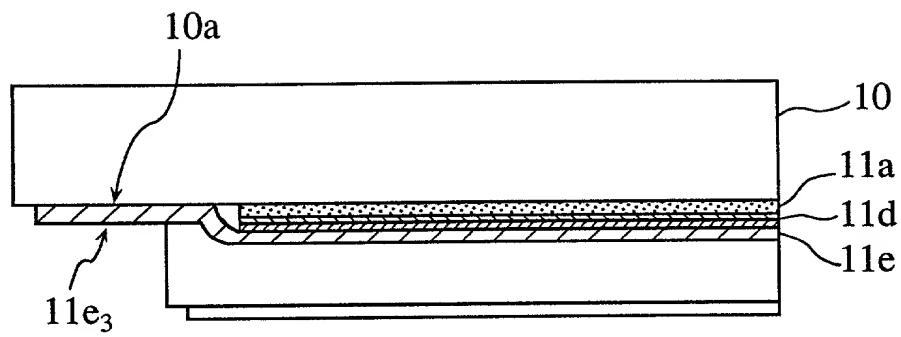


FIG.5A




FIG.5E

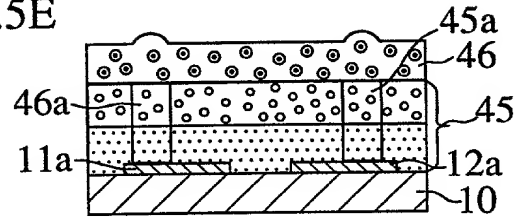


FIG.5B




FIG.5F

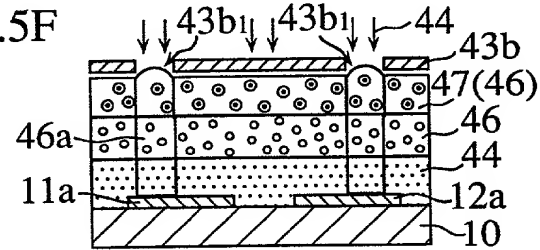


FIG.5C


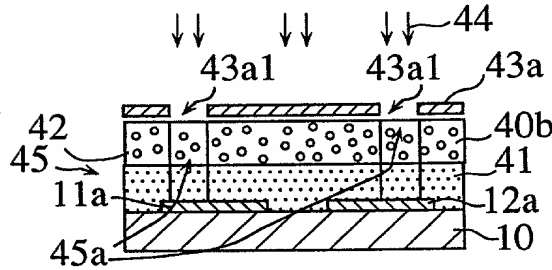


FIG.5G

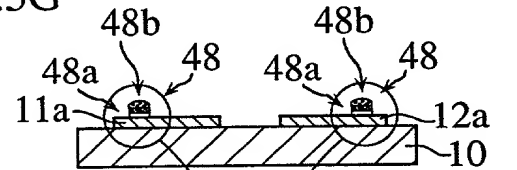

ENLARGED

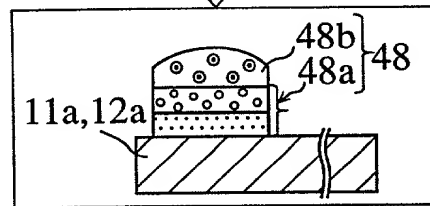


FIG.5D


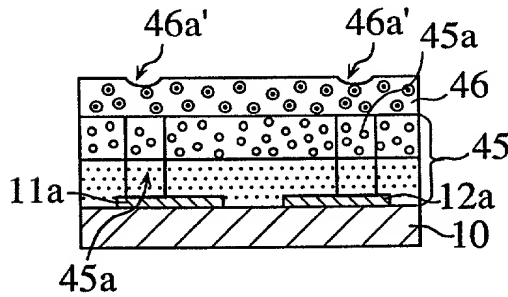


FIG.5H



ENLARGED

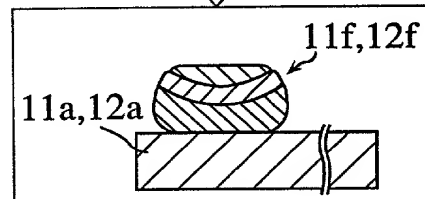


FIG.6A

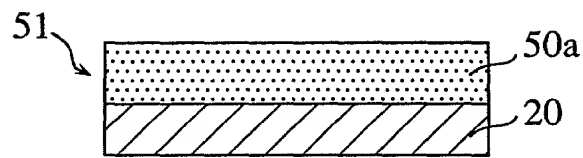


FIG.6B

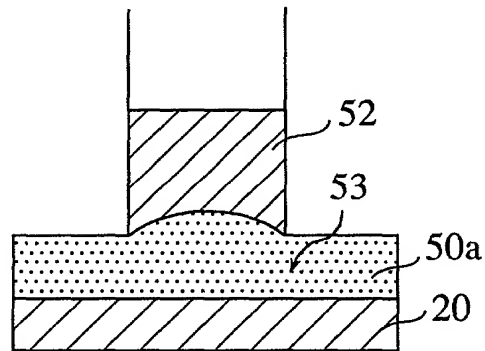


FIG.6C

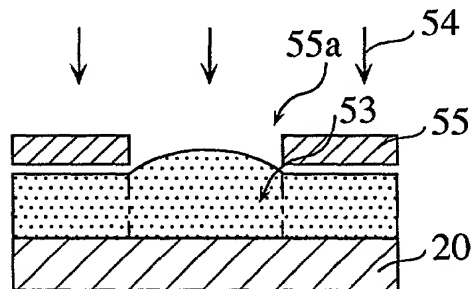


FIG.6D

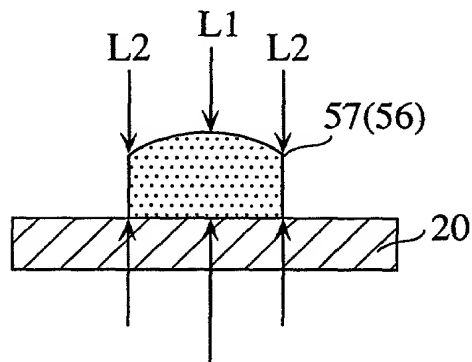


FIG.6E




FIG. 7A

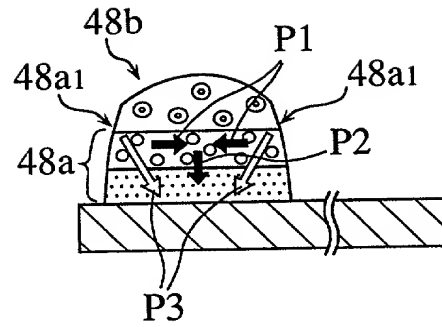


FIG. 7B

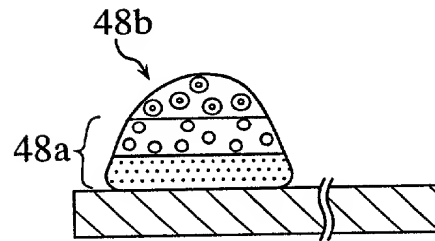


FIG. 7C

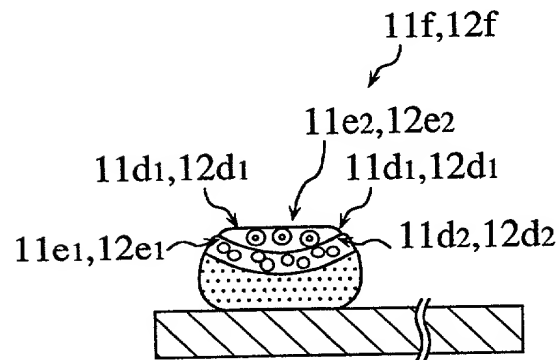




FIG. 8A

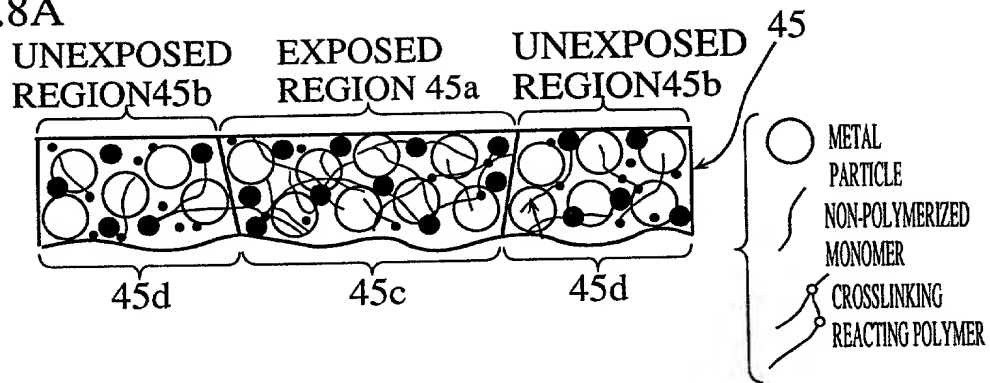


FIG. 8B

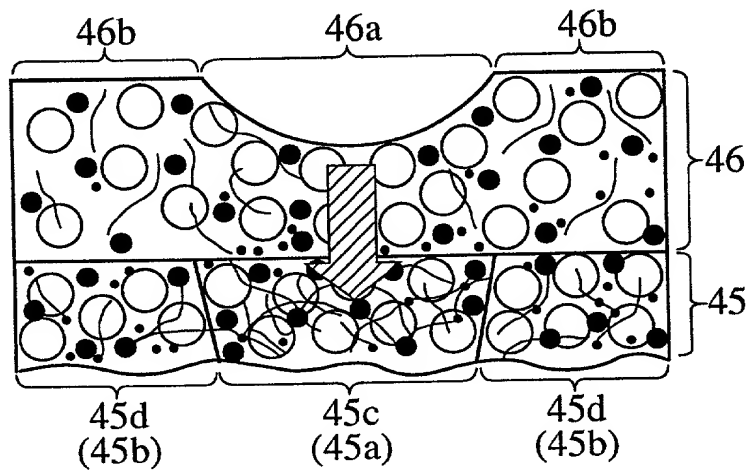


FIG. 8C

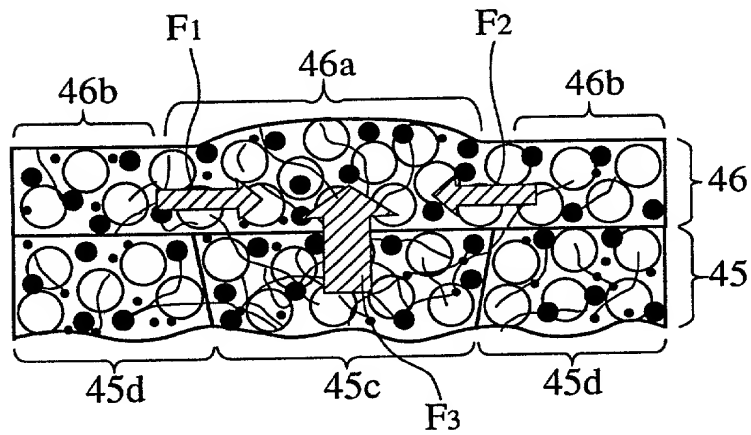


FIG.9A

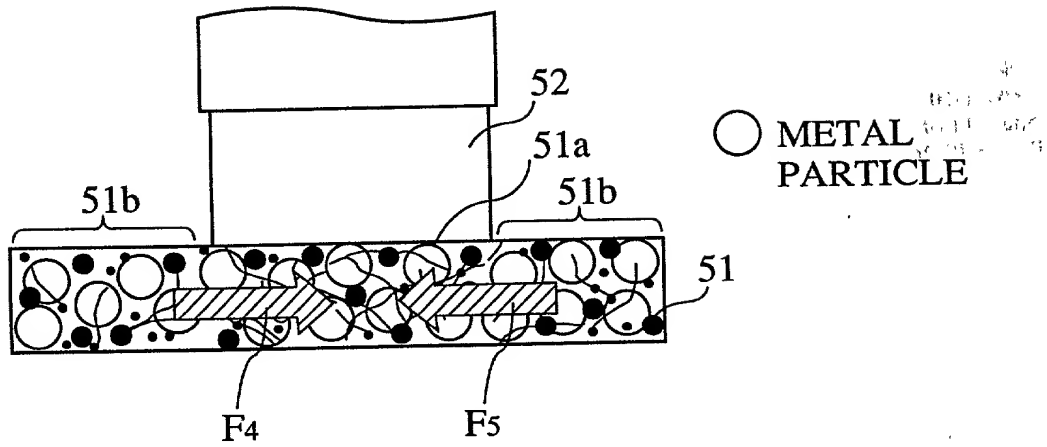


FIG.9B

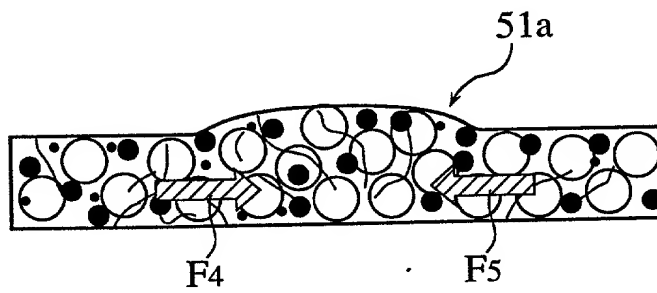


FIG.10

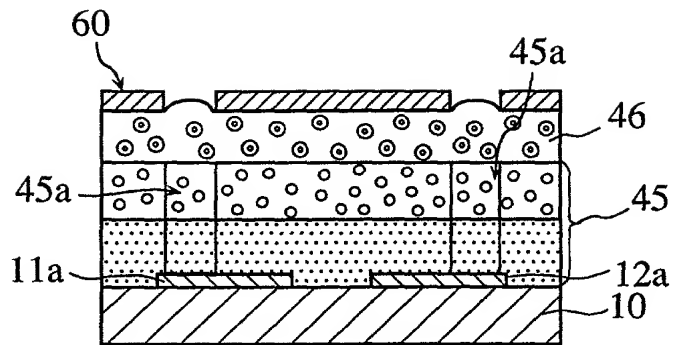


FIG. 11

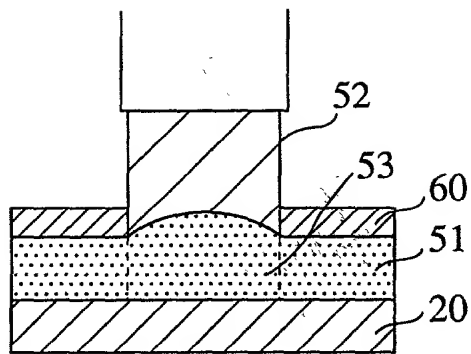


FIG.12A

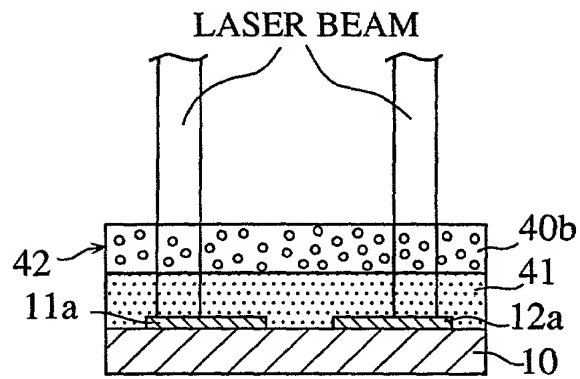


FIG.12B

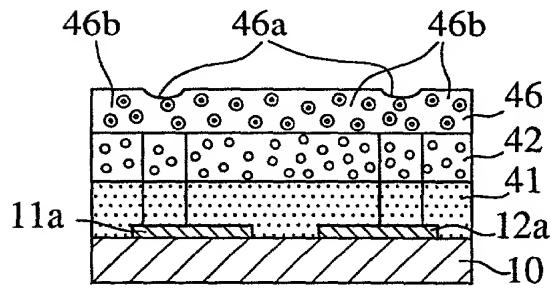


FIG.13


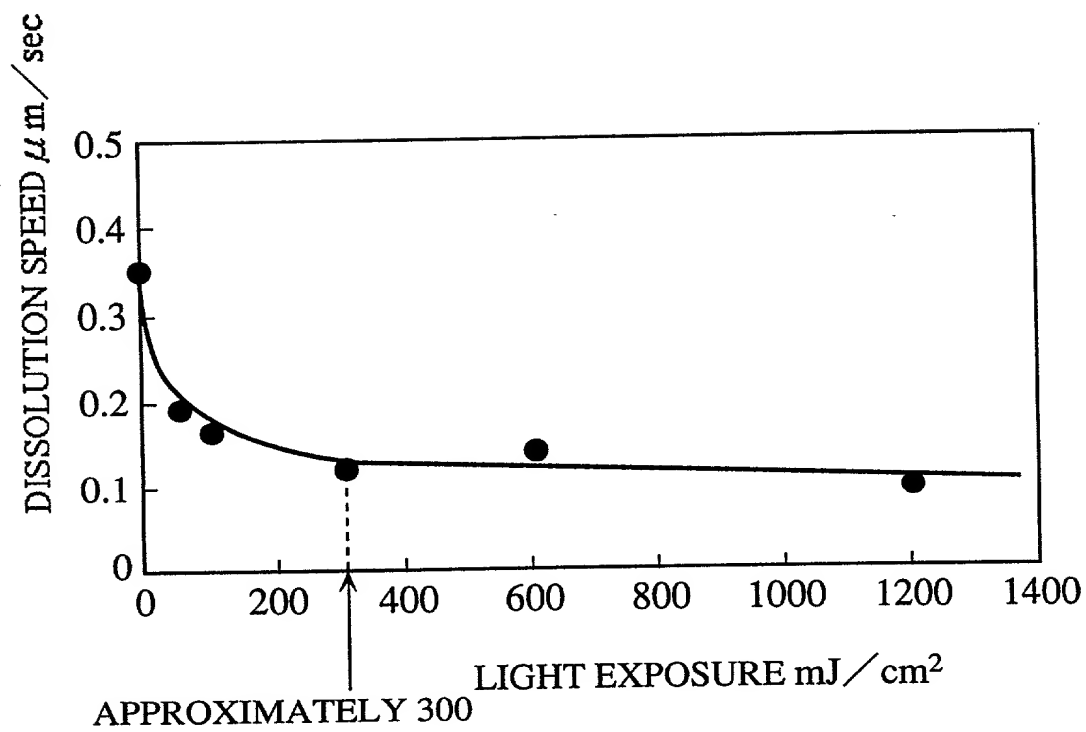


FIG. 14

## PRIOR ART

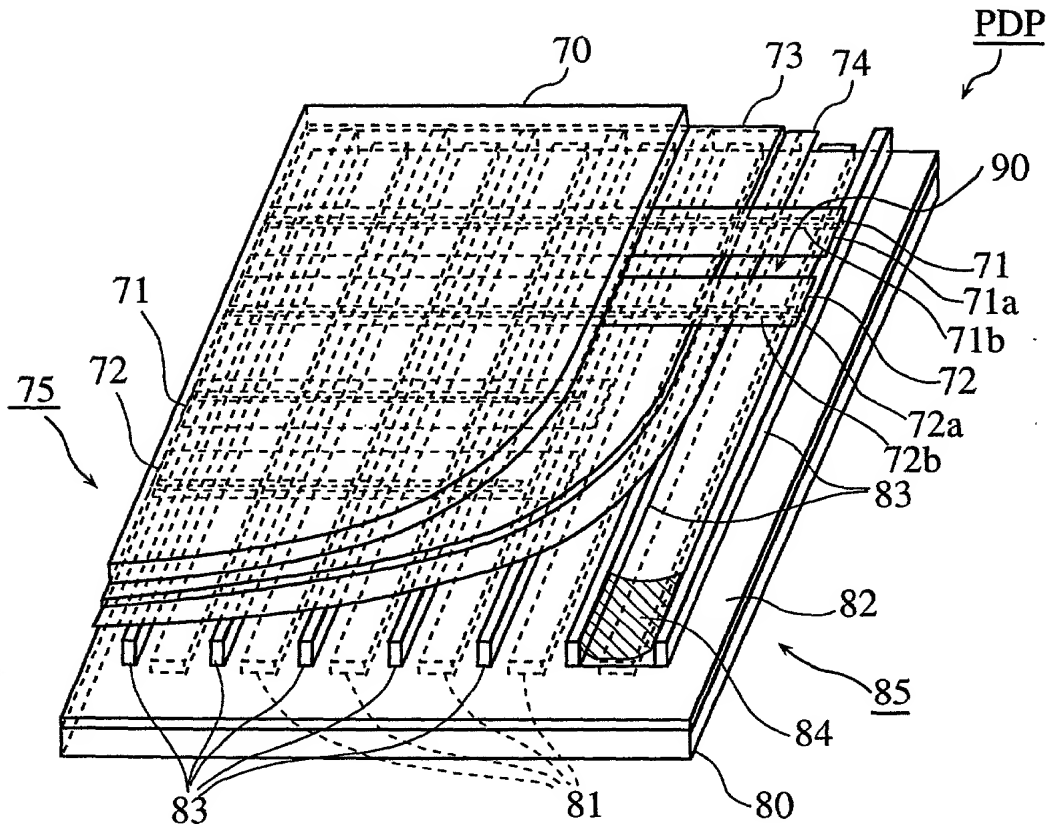

## PRIOR ART

FIG. 15A




FIG. 15B

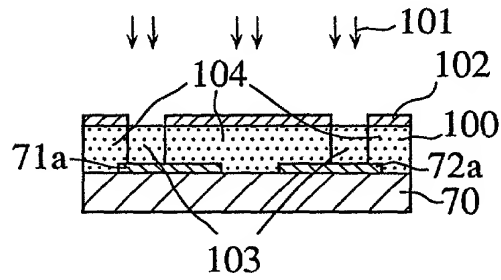


FIG. 15C

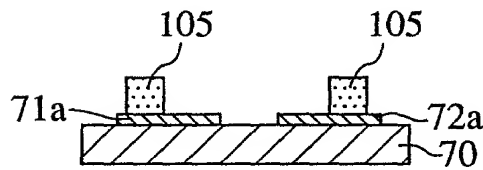


FIG. 15D

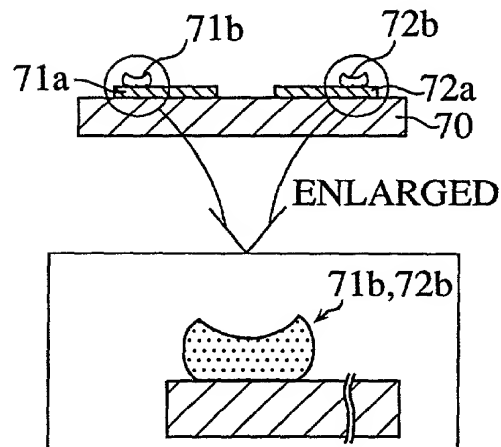




FIG. 16A PRIOR ART




FIG. 16B

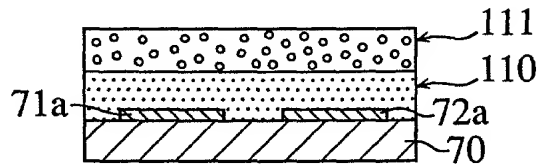


FIG. 16C

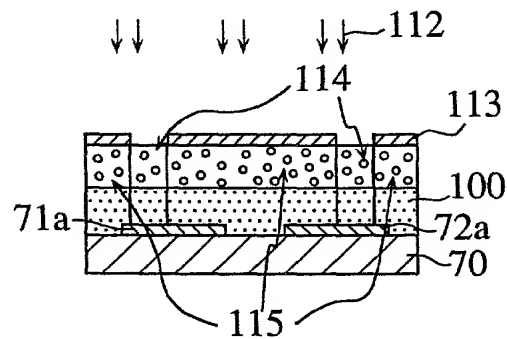


FIG. 16D




FIG. 16E


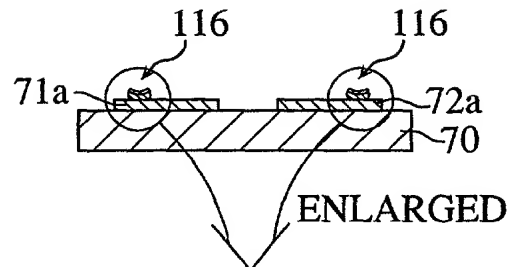


FIG. 16F

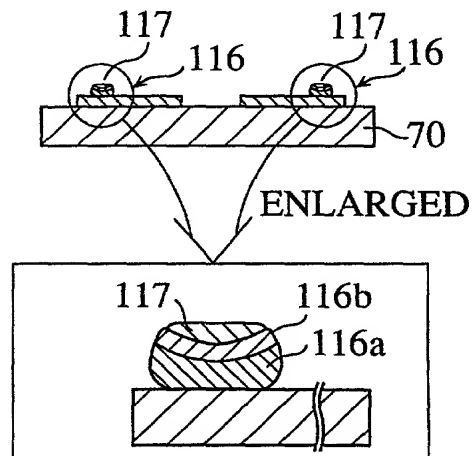

Docket No.

# Declaration and Power of Attorney For Patent Application

## English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD FOR PRODUCING METAL ELECTRODE

the specification of which

(check one)

☐ is attached hereto.

☒ was filed on 18/10/00 as United States Application No. or PCT International Application Number PCT/JP00/07225 (U.S. Serial No. 09/857,721) and was amended on \_\_\_\_\_

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

_____ (Number) 11-296323	_____ (Country) Japan	_____ (Day/Month/Year Filed) 19/10/1999	<input type="checkbox"/>
_____ (Number) 11-357232	_____ (Country) Japan	_____ (Day/Month/Year Filed) 16/12/1999	<input type="checkbox"/>
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Status)  
(patented, pending, abandoned)

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Status)  
(patented, pending, abandoned)

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Status)  
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Joseph W. Price, Reg. No. 25,124

Doyle B. Johnson, Reg. No. 39,240

Albin H. Gess, Reg. No. 25,726

Michael J. Moffatt, Reg. No. 39,304

Franklin D. Ubell, Reg. No. 27,009

Bradley D. Blanche, Reg. No. 38,387

Send Correspondence to: Joseph W. Price  
PRICE, GESS & UBELL  
2100 S.E. Main St., Ste. 250  
Irvine, CA 92614

Direct Telephone Calls to: (name and telephone number)  
Joseph W. Price, 949/261-8433

Full name of sole or first inventor	<u>Hideki ASIDA</u>	
Sole or first inventor's signature	<u>Hideki Ashida</u>	Date <u>June 6, 2001</u>
Residence	<u>Shoukouryou, 25-3, Midou-cho, Kadoma-shi, Osaka 571-0064 Japan JPX</u>	
Citizenship	<u>Japan</u>	
Post Office Address	<u>same as residence</u>	

Full name of second inventor, if any	<u>Shinya FUJIWARA</u>	
Second inventor's signature	<u>Shinya Fujiwara</u>	Date <u>June 6, 2001</u>
Residence	<u>32-90, Otowa-Isejukucho, Yamashina-ku, Kyoto-shi, Kyoto 607-8072</u>	
Citizenship	<u>Japan JPX</u>	
Post Office Address	<u>same as residence</u>	

340 Full name of third inventor, if any

Hideki MARUNAKA

Third inventor's signature

Hideki Marunaka

Date

June 6, 2001

Residence

Room A-302, Fushimiso, 138-89, Shimizu-cho, Hazukashi, Fusimi-ku

Citizenship

Kyoto-shi, Kyoto 612-8485 Japan JPK

Japan

Post Office Address

same as residence

420 Full name of fourth inventor, if any

Tadashi NAKAGAWA

Fourth inventor's signature

Tadashi Nakagawa

Date

June 6, 2001

Residence

Seisyunryou, 2-8, Saiwai-cho, Takatsuki-shi, Osaka 569-1143

Citizenship

Japan JPK

Japan

Post Office Address

same as residence

520 Full name of fifth inventor, if any

Keisuke SUMIDA

Fifth inventor's signature

Keisuke Sumida

Date

June 6, 2001

Residence

71-18-102, Sakuragaoka, Hirakata-shi, Osaka 573-0018 Japan JPK

Citizenship

Japan

Post Office Address

same as residence

620 Full name of sixth inventor, if any

Hideaki YASUI

Sixth inventor's signature

Hideaki Yasui

Date

June 6, 2001

Residence

75-20, Suyamacho, Hirakata-shi, Osaka 573-1164 Japan JPK

Citizenship

Japan

Post Office Address

same as residence

Full name of seventh inventor, if any	Kazuhiko SUGIMOTO	
Seventh inventor's signature	Kazuhiko Sugimoto	Date June 6, 2001
Residence	1-1-203, Taisho-cho, Ibaraki-shi, <u>Osaka</u> 567-0867 Japan <u>JPR</u>	
Citizenship	Japan	
Post Office Address	same as residence	

Full name of eighth inventor, if any	Hiroyosi TANAKA	
Eighth inventor's signature	Hiroyoshi Tanaka	Date June 6, 2001
Residence	288-3, Kiyomizu 1-chome, Higashiyama-ku, Kyoto-shi, <u>Kyoto</u>	
Citizenship	605-0862 Japan <u>JPR</u>	
Post Office Address	same as residence	

Full name of ninth inventor, if any	
Ninth inventor's signature	Date
Residence	
Citizenship	
Post Office Address	

Full name of tenth inventor, if any	
Tenth inventor's signature	Date
Residence	
Citizenship	
Post Office Address	